


LNMFS Frequency Synthesizer

LNMFS-1076

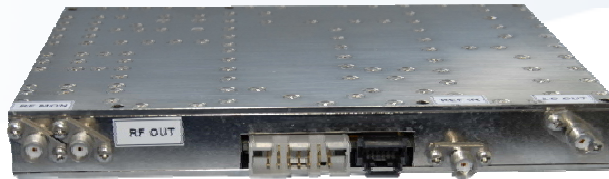

FREQUENCY RANGE:
4.505-5.575 GHz

FEATURES

- Very Low Phase Noise, 20 dB better than IESS-308
- Low Spurious:<-85 dBc
- 1 KHz and 125 KHz Standard Steps Size Options
- Includes Fixed Frequency L-Band Output
- Serial Control Simplifies Interfacing
- Compact Modular Construction: 7.7" X 5.5" X 0.73"
- Low DC Power Consumption, less than 8 watts
- Wide Operating Temperature Range
- Meets ESTI 300019-1-4 Shock and Vibration Requirements

APPLICATIONS

- LO for Fixed and Mobile SATCOM Converters
- LO for Digital Radio, up to 512 QAM
- Instrumentation
- OEM Products

GENERAL DESCRIPTION

The LNMFS family of modular sub-octave coverage frequency synthesizers achieves exceptionally low phase noise in a rugged, compact package. Within the LNMFS, basic PLL indirect synthesizer architecture is enhanced using DDS and FPGA technology. This allows small step size and low spurious output levels to be achieved with moderate switching speed. The serial interface simplifies designing the synthesizer for any system application.

SPECIFICATIONS

Output Frequency		4.505 – 5.575 GHz
Frequency Bandwidth		1.07 GHz
Step Size		1 KHz
Switching Speed		< 50 mS
Power Output		12 to 16 dBm
In Band Spurious		< -65 dBc
Out of Band Spurious		< -55 dBc
Harmonics		< -20 dBc
Phase Noise	1 KHz	< -95 dBc/Hz
	10 KHz	< -100 dBc/Hz
	100 KHz	< -100 dBc/Hz
	1 MHz	< -125 dBc/Hz

Fixed L-Band Output

Frequency		1080 MHz
Power Output		12 to 16 dBm
Spurious		< -65 dBc
Harmonics		< -40 dBc

External Reference Input



Frequency		10 MHz
Input Level		-3 to +7 dBm

Power Consumption

DC Supply	+15.3 V	550 mA
	+5.3 V	1200 mA

Operating Temp. Range -25°C to +75°C

OUTLINE DRAWING

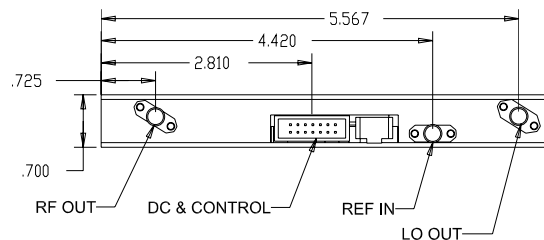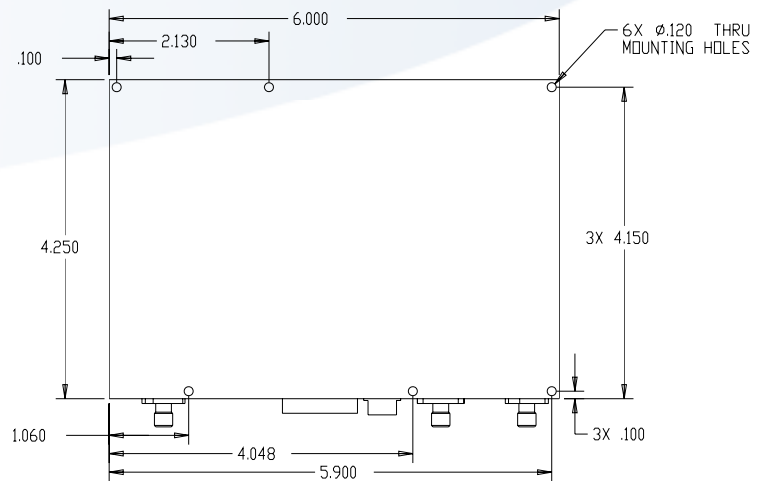

NOTES:
CONNECTORS:
RF OUT, LO OUT & REF IN: SMA
TYPE JACK (FEMALE).
DC & CONTROL: IDC TYPE, 14 PIN

PIN	FUNCTION
1	NC
2	GND
3	+5.25 to +5.50V
4	GND
5	+12 to +18V
6	GND
7	LOCK
8	GND
9	DATA
10	GND
11	CLOCK
12	GND
13	ENABLE
14	GND

FOR ADDITIONAL INFORMATION CONTACT
sales@elcom-tech.com

***Export of Elcom Technologies products is subject to U.S. export controls. Licenses may be required.*